

TROPHY-ACCESS cardless Conditional Access Module



TROPHY-ACCESS module installed in CI or CI + slot of TV-set or Common Interface of digital set-top box .


Descrambling of digital signal gated by TROPHY-ACCESS CAS implemented without smart card.

Authorized service TROPHY-ACCESS center implement programming of module and assign a unique ID.

ID of TROPHY-ACCESS module indicated in QR code deposited on the back side of the module.

ID of TROPHY-ACCESS module is displayed in the menu of the TV-set or set-top box . The menu also displays the current user 's account balance and personal messages generated by the TRS-Trophy headend.

Module is fully compatible to the equipment which support EN50221 standard (Common Interface Specification for Conditional Access and other Digital Video Broadcasting Decoder Applications).

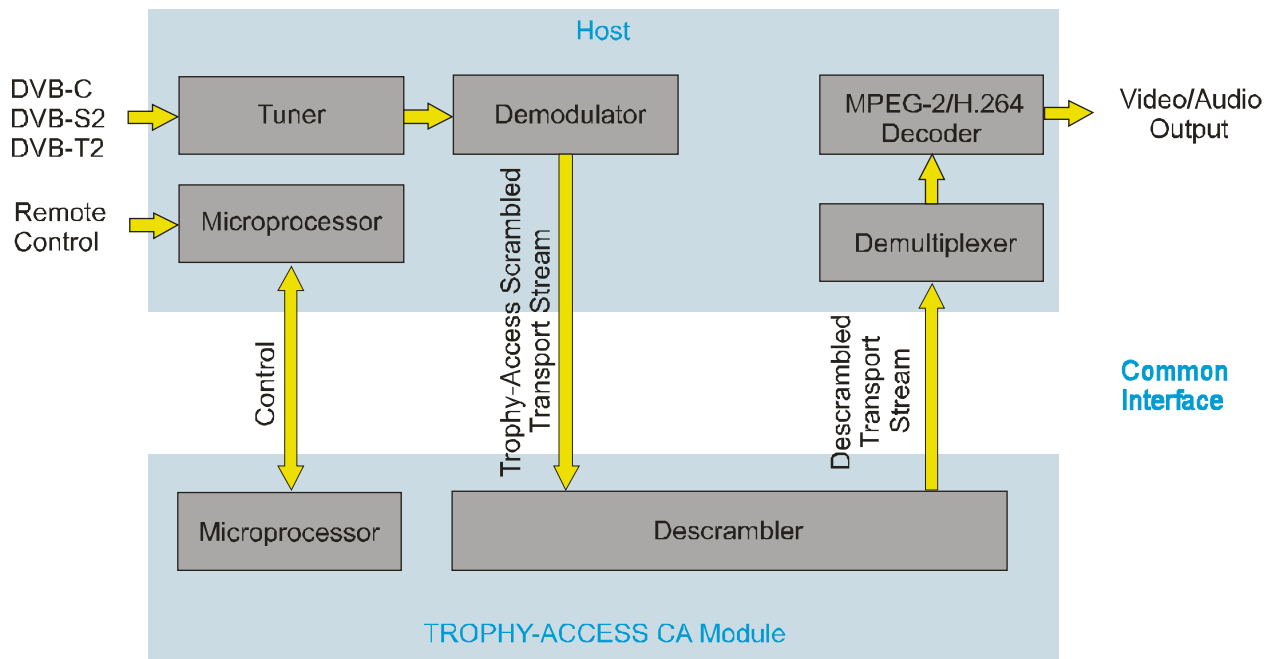

Connector type	68-pins PCMCIA
Voltage	4,5V...5,5V
Current consumption	no more than 100mA
Size	100MM x 58MM x 5MM
Working temperature	0...50°C
Weight	45 gm